



C.E. Electronics, Inc.
 2107 Industrial Drive
 Bryan, OH 43506
 PH (419) 636-6705 FX (419) 636-2516
 www.ceelectronics.com


REG-BUZZER

Ver. 1 Rel. 05/23/07

ACCESSORIES

Normal level is full
 countre-clockwise. Adjust
 only if controller offset
 voltage is large.

BIAS
 VOLTAGE
 ADJUSTMENT

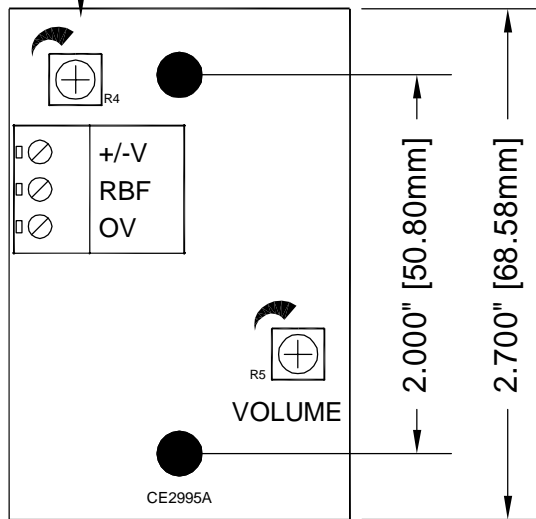

Volume Control to adjust
 dB level to > 35dB(a) but not
 more then 65dB(a) to satisfy
 EN 81-70

1.800" [45.72mm]

REG-BUZZER

Call registration buzzer

Meets all requirements of EN81-70 code for call registration.

Operates between 12 - 120 VAC
 and 12 - 120VDC positive or negative.

Volume adjustable between 35 dB(A) and 65 dB(A)

TO ORDER:-SPECIFY REG-BUZZER